


Locking system with space between holes 105/130 internal locks

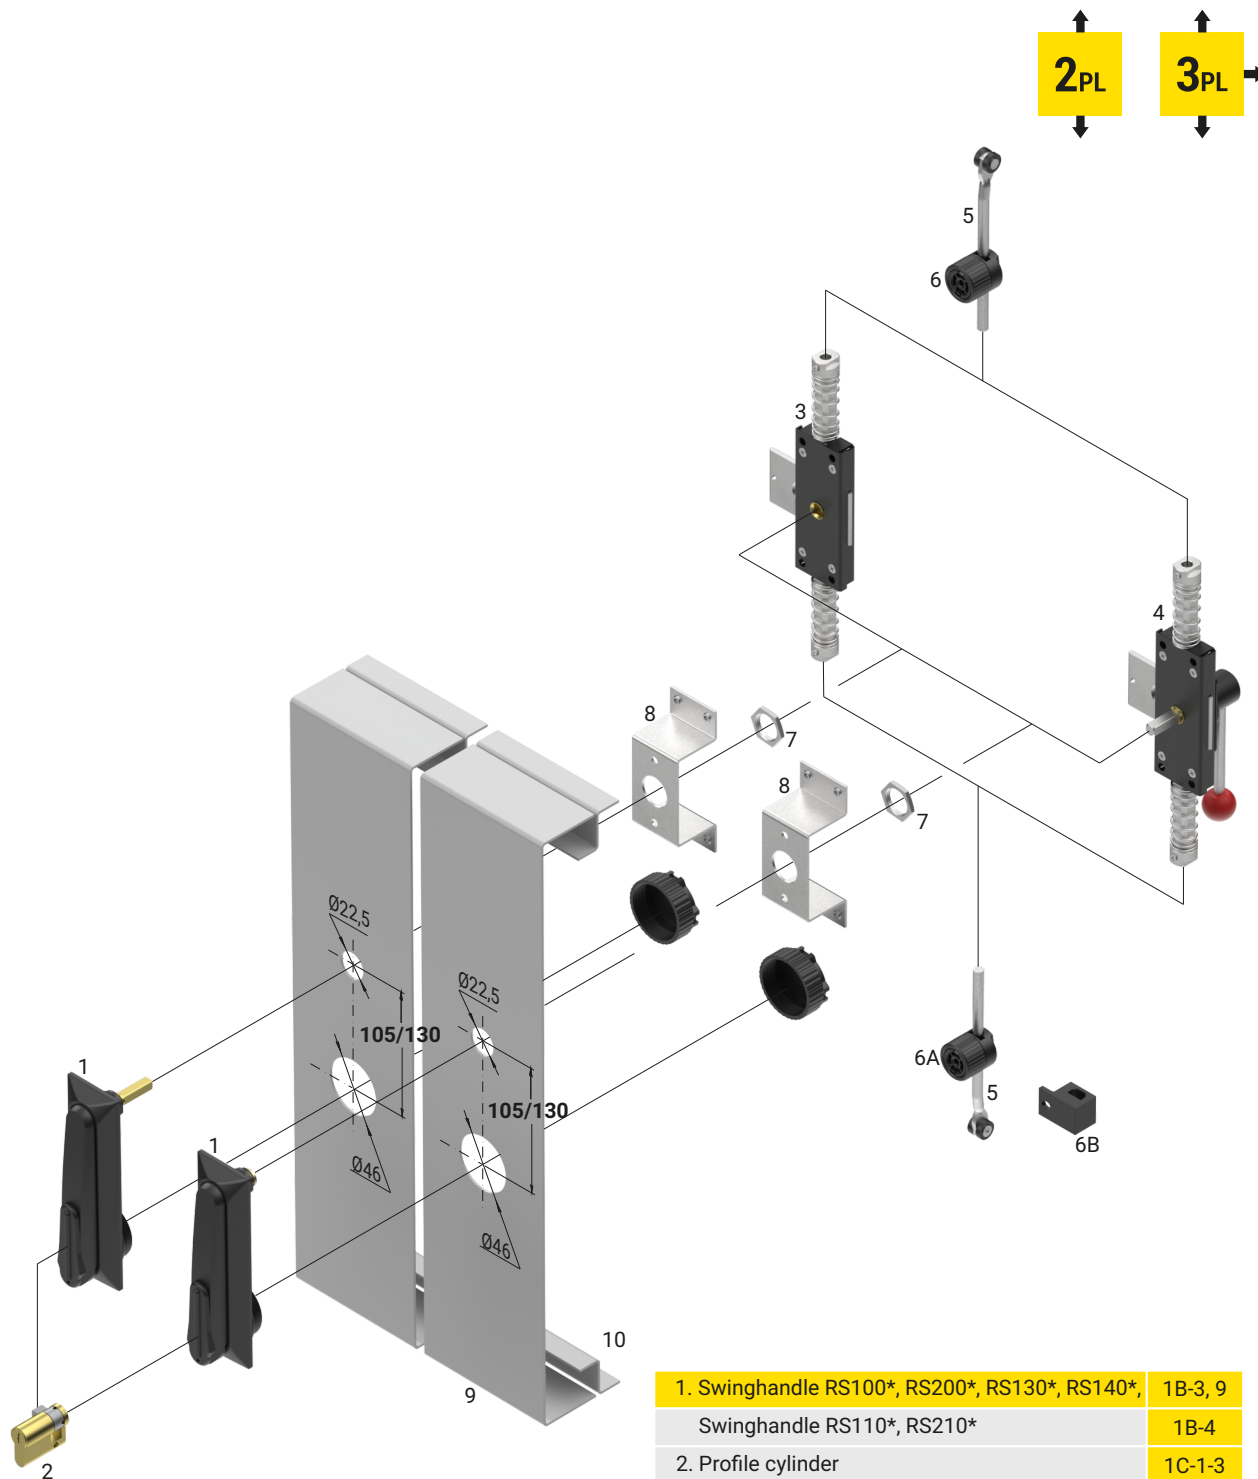

1. Swinghandle RS100*, RS200*, RS130*, RS140*, Swinghandle RS110*, RS210*	1B-3, 9 1B-4
2. Profile cylinder	1C-1-3
3. Internal lock:	
ZWM8 or ZWM10	1B-1
ZW8 or ZW10	1B-1
4. Internal lock „panik“:	
ZWPM8 or ZWPM10	1B-1-2
ZWP8 or ZWP10	
5. Rod ø8	1C-5
6A. Rod guide ø8	6B. Rod guide RW
	1C-6-7
7. Nut M22 x 1,5	-
8. Lock support*	-
9. Door of the box	-
10. Edge of the box	-

(* **When you order locks RS100, RS110, RS200, RS210, RS130, RS140 to *Internal lock***, you should add letters ZW e.e (RS100ZW, RS200ZW). **When you order locks RS100, RS110, RS200, RS210 to *Internal lock panik***, you should add letters ZWP e.g. (RS100ZWP) **Lock support** only on special request.