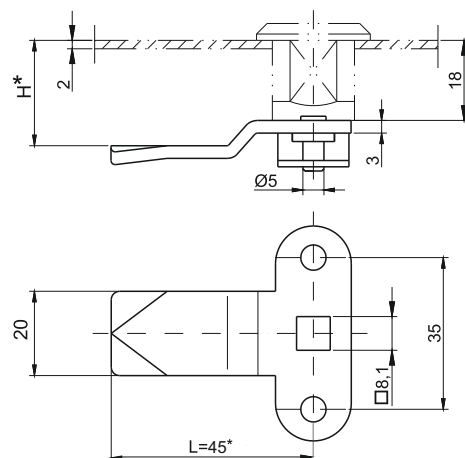
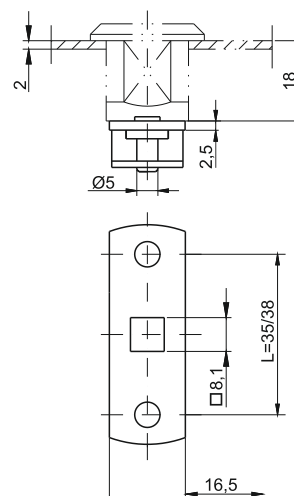







stainless steel

3-point CAM
 (without limiter
 with *protective element*)

2-point CAM
 (with protective element)

2-point CAM
 (with Cir Clips ver. 1, ver. 2, ver. 3)




ver. 1



ver. 2



ver. 3



CAT. NUMBER			NAME	DIMENSIONS H [MM]	MATERIAL
	STEEL ZINC PLATED	STAINLESS STEEL			
JB-30018		JB-30018SN	3-point Cam without limiter with protective element	18	Steel zinc plated or stainless steel
JB-30021		JB-30021SN		21	
JB-30024		JB-30024SN		24	
JB-30029		JB-30029SN		29	
21 CAM RANGE [G]	JB-20018/35	JB-20018/35SN	2-point Cam with protective element	18L=35	Steel zinc plated or stainless steel
	JB-20018/38	JB-20018/38SN		18L=38	
	J-20018/35	J-20018/35SN	2-point Cam with Cir Clips ver. 1	18L=35	Steel zinc plated or stainless steel
	J-20018/38	J-20018/38SN		18L=38	
	J-20018/36	J-20018/36SN	2-point Cam with Cir Clips ver. 2	18L=36	Steel zinc plated or stainless steel
	JA-20018/36	JA-20018/36SN	2-point Cam with Cir Clips ver.3	18L=36	

• *dimension negotiable

NOTE: When ordering 2-point Cams with dimension between pins 35 mm you must add /35 e.g. (JB-20018/35 or J-20018/35).