

Index






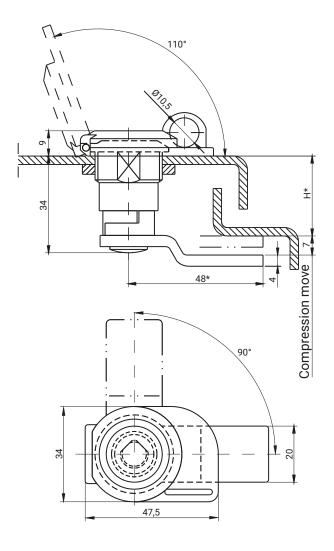



Pic.1 Lock in the closed position. The arrow means the direction opening the lock



Lock on the drawing in the left door version The possibility adapting the lock to the door right (Pic.1).

INSER	RT [X]								FINISH [C]					
(Θ			\ominus		O	0	Nickel	RAL 9005	RAL 7035		
T6	T8	Т9	L	KW8	S	N	C9	D3	D5	02	04	05		
TYPE OF LOCK				COMPONENTS				N	MATERIAL					
				Housing				Z	ZAMAK 5					
M24B			Cam, insert				S	Steel zinc plated						
			Blocade				S	Stainless steel						

How to order:	M24B —	Χ	-	20	-	С	-	L
Type of lock								
Type of insert								
Height of cam H =20, 23, 26								
Finish								
Type of lock (RH - Right, LH-Left)								

^{*} possibility to make in another dimension

Locks | 2A-20 www.roztocze.eu