


# Lock ZZR18, ZZR19, ZZR28, ZZR38, ZZR50

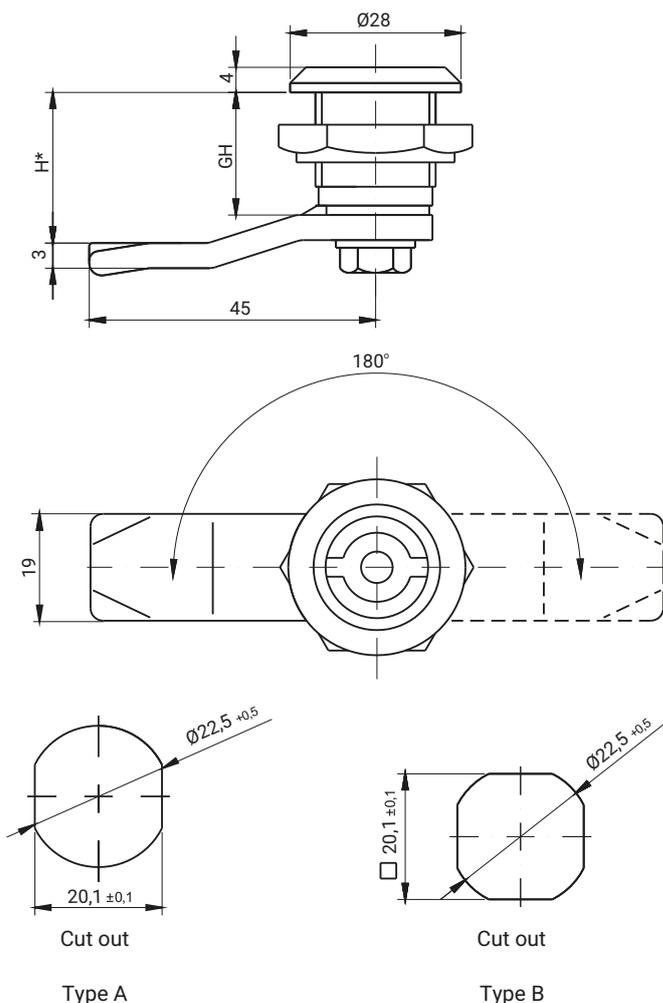

Lock adapted to work with 3 points cam.

Note: Lock milled in with 4 sides (Type B rear lock) - on request.

where:

**ZZR18** = GH=18

**ZZR19** = GH=19

**ZZR28** = GH=28

**ZZR38** = GH=38

**ZZR50** = GH=50

INSERT [X]									FINISH [C]
									Chrome
D3	D5	T8	T9	KW8	S	N	C9	RAILWAY	01
TYPE OF LOCK				COMPONENTS				MATERIAL	
<b>ZZR18, ZZR19, ZZR28, ZZR38, ZZR50</b>				Housing, insert				Steel	
				Cam				Steel zinc plated	
<b>ZZR18SN, ZZR19SN, ZZR28SN, ZZR38SN, ZZR50SN</b>				Housing, insert				Stainless steel	
				Cam				Stainless steel	


## How to order:

Type of lock

Type of insert

Height cam H

Finish

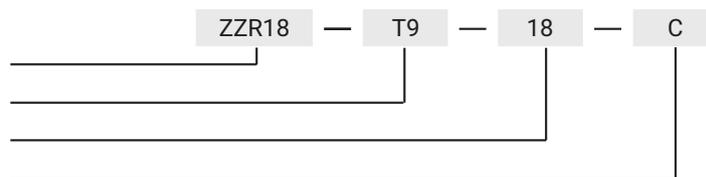

\* possibility to make in another dimension

\*\*possibility of making lock grade stainless steel. 316

The lock is fitted with cams from the group: 12, 14, 17, 17A, 18, 32, 34, JK1-16018, JK2-16018, J-6000.03, J-6000.04, JK-1610.01, JZ-002 (pg. 1C-10 to 1C-23)