
Index


Lock M22SA18 with foamed sealing PUR





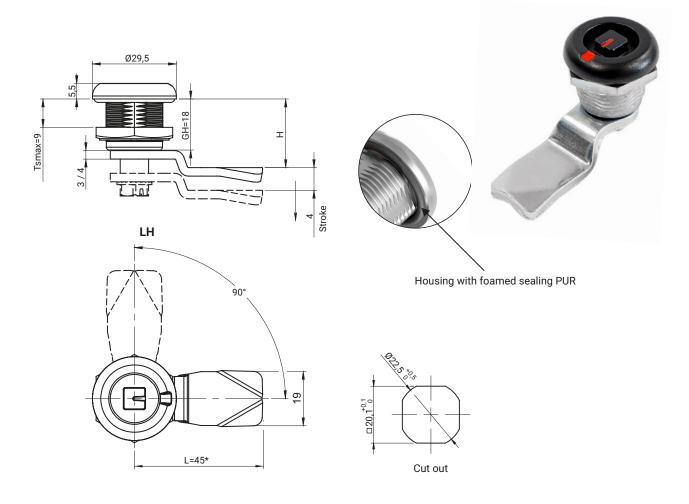

TYPE OF LOCK		COMPONEN	COMPONENTS		MATERIAL	
M22SA18		Housing, Insert		ZAMAK 5		
INSERTS [X]			FINISH [C]			
			Chrome		RAL9005	
KW8	Т8	D5	01		04	

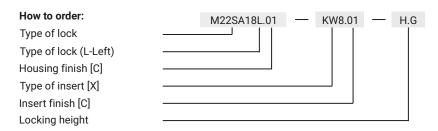

where:

H - the cam unbending dimension

G - cam group

The lock is fitted with cams from the group: 15, 16, 19, 21, 35, 36, JK1-10018, JK2-10018, J-6000.01, J-6000.02, JK-1610.01, JZ-001 (pg. 1C-12 to 1C-23)

www.roztocze.eu Locks | 2A-48