


Screw clamps v-klema type

HS steel double 2/70-300

HS steel triple 3/50-240



HS 2/70-300

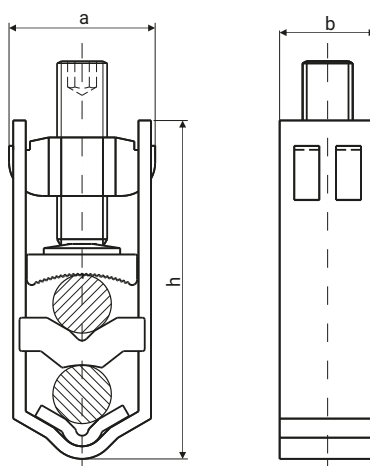

DETAIL	CROSS-SECTION [mm ²]				NOMINAL CROSS-SECTION [mm ²]	MAX TIGHTENING TORQUE [Nm]	DIMENSIONS		
	sm	se	rm	re			a	b	h
HS 2/70-300	70-240	95-300	50-120	70-150	185	30	35	22	81
HS 2/70-300									
Clamp	Brass tin-plated								
Housing	Spring steel zinc-plated								
Screw	Steel zinc-plated								
Compression plate	Brass tin-plated								
Nut	Brass tin-plated								

* Screw clamps conform to EN 60947-7-1 (IEC 60947-7-1)

HS 3/50-240

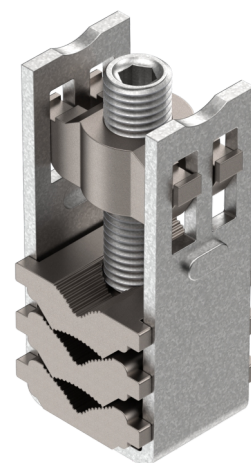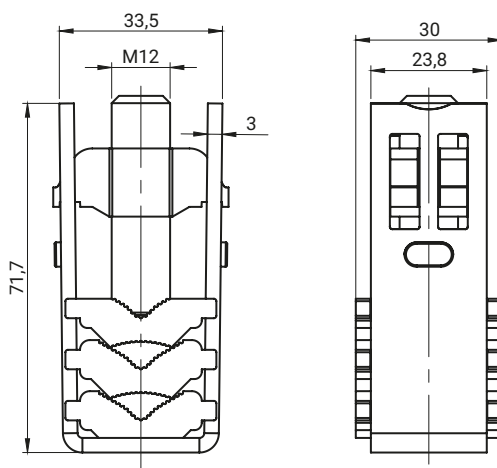

DETAIL	CROSS-SECTION [mm ²]				NOMINAL CROSS-SECTION [mm ²]	MAX TIGHTENING TORQUE [Nm]	DIMENSIONS		
	sm	se	rm	re			a	b	h
HS 3/50-240	35-185	35-185	25-120	25-150	180	40	33,5	30	71,7
HS 3/50-240									
Clamp	Brass tin-plated								
Housing	Steel zinc-plated								
Screw	Steel zinc-plated								
Nut	Brass tin-plated								

