






Screw clamps v-klema type HM, HS steel single

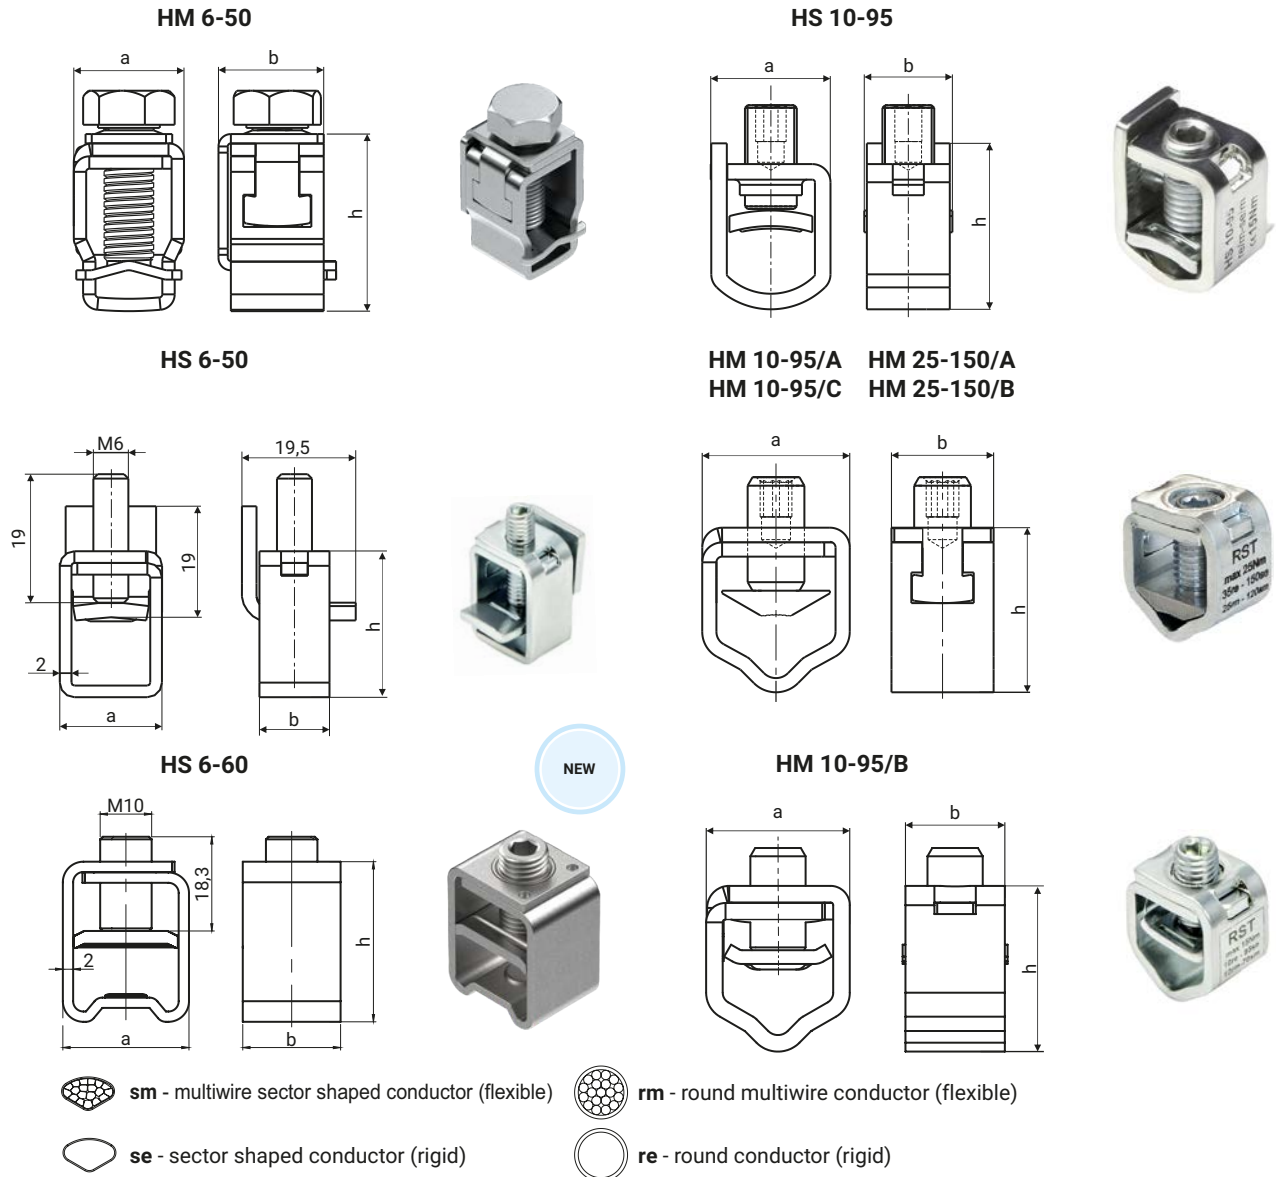

-  **sm** - multiwire sector shaped conductor (flexible)
-  **rm** - round multiwire conductor (flexible)
-  **se** - sector shaped conductor (rigid)
-  **re** - round conductor (rigid)

DETAIL	CROSS-SECTION [mm ²]				NOMINAL CROSS-SECTION [mm ²]	MAX TIGHTENING TORQUE [Nm]	DIMENSIONS		
	sm	se	rm	re			a	b	h
HM 6-50	25-50	25-50	6-50	6-50	50	8	18	16	30
HM 10-95/A	25-95	20-120	10-70	10-70	95	15	26	18	30
HM 10-95/B	25-95	20-120	10-70	10-70	95	15	26	18	30
HM 10-95/C	25-95	20-120	10-70	10-70	95	15	26	18	30
HM 25-150/A	25-120	35-150	25-120	35-120	95	25	26	18	31,5
HM 25-150/B	25-120	35-150	25-120	35-120	95	25	26	18	31,5
HS 6-50	-	-	6-50	6-50	50	6	17,5	12	25
HS 6-60	-	-	6-120	6-95	95	10	24,5	19	31
HS 10-95	25-95	25-95	10-95	10-70	95	15	23	16	32

	HM 10-95/A	HM 10-95/B	HM 10-95/C	HM 25-150/A	HM 25-150/B
Housing	Stainless steel	Spring steel zinc-plated	Spring steel zinc-plated	Stainless steel	Steel zinc-plated
Clamp	Brass tin-plated	Spring steel zinc-plated	Brass tin-plated	Brass tin-plated	Brass tin-plated
Screw	Stainless steel	Steel zinc-plated	Steel zinc-plated	Stainless steel	Steel zinc-plated

	HM 6-50	HS 6-50	HS 10-95	HS 6-60
Housing	Spring steel zinc-plated	Spring steel zinc-plated	Spring steel zinc-plated	Steel zinc-plated
Clamp	Spring steel zinc-plated	Spring steel zinc-plated	Spring steel zinc-plated	
Screw	Steel zinc-plated	Steel zinc-plated	Steel zinc-plated	

* Screw clamps conform to EN 60947-7-1 (IEC 60947-7-1)