


| NR KATALOGOWY | MATERIAŁ | KĄT OBROTU | WYMIAR MONTAŻOWY [mm] | | MINIMALNA SZER. DRZWI |
|---------------|-----------------|------------|-----------------------|-----|-----------------------|
| | | | X | Y | |
| 4.401.001 | Stal ocynkowana | 90° | 140 | 176 | 399 |
| | | 105° | 120 | 162 | 385 |
| 4.401.001SN | Stal nierdzewna | 120° | 110 | 149 | 372 |
| | | 135° | 100 | 144 | 367 |

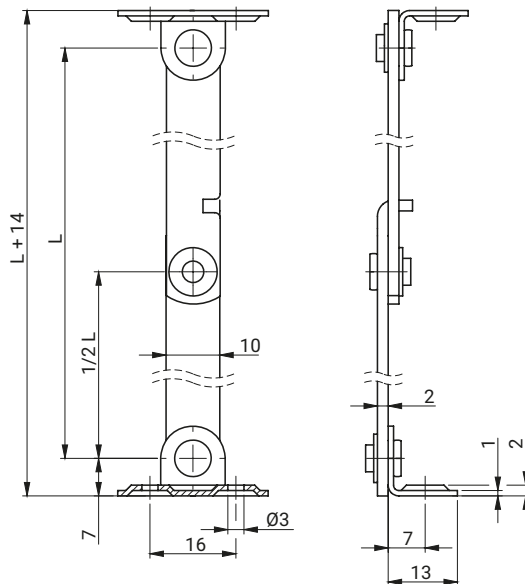

| NR KATALOGOWY | WYMIAR L [mm] | MATERIAŁ |
|---------------|---------------|-----------------|
| 4.401.200 | 292 | Stal ocynkowana |
| 4.401.201 | 252 | |
| 4.401.202 | 202 | |
| 4.401.203 | 135 | |
| 4.401.200SN | 292 | Stal nierdzewna |
| 4.401.201SN | 252 | |
| 4.401.202SN | 202 | |
| 4.401.203SN | 135 | |