


Spacing of holes

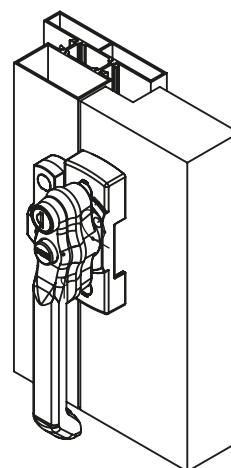

- A** Locked position
- B** Decompression - lock is closed, but pressure is removed
- C** Open position - press button 1 to open

Specification::

1. Locks 4.120.001 and 4.120.002 with a leakage function - protection of the cabinet user against uncontrolled opening of the door due to overpressure in the climate control panel. It allows for pressure compensation before opening the door. Locks 4.120.003 and 4.120.004 (without a button) do not have a leakage function before opening the lock..
2. Resistance of the lock to pressure of 5000 N/mm<sup>2</sup>.
3. The lock can be mounted on doors with a thickness of 20-100 mm.

| CATALOGUE NO. | VERSION      |                     | COMPONENTS | MATERIALS |
|---------------|--------------|---------------------|------------|-----------|
| 4.120.001     | lockable*    | with push button    | Handle     | PA6GF30   |
| 4.120.002     | not lockable | with push button    | Base       | ZAMAK     |
| 4.120.003     | lockable*    | without push button | Catch      | ZAMAK     |
| 4.120.004     | not lockable | without push button | Cam        | Steel     |

\* possibility to use different key codes