


ADJUSTABLE FEET

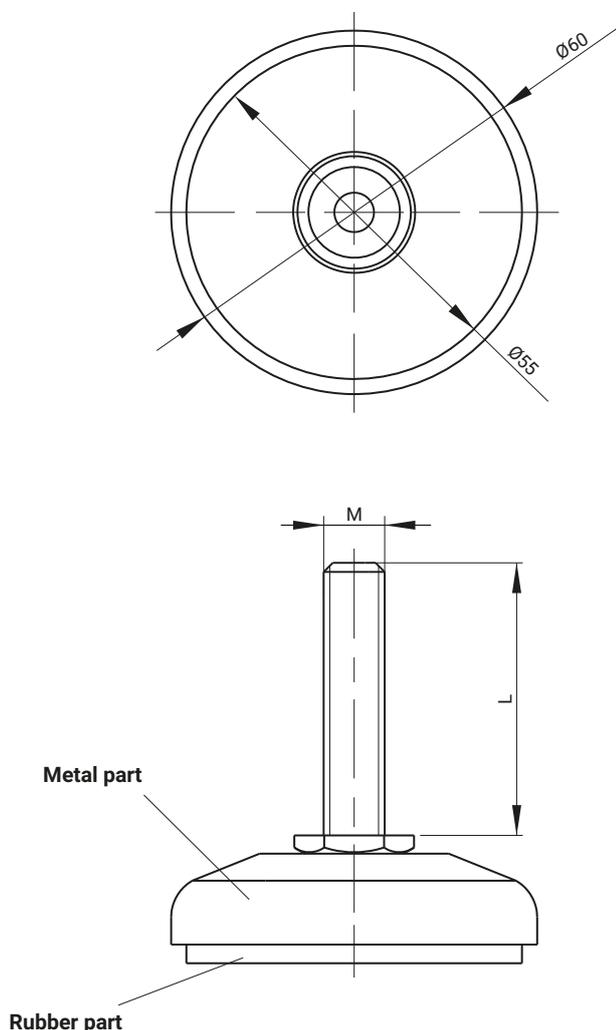

* DIN 934 M10 or M12 nut included.

CATALOGUE NO.	DIMENSION		* MAXIMUM WORKING LOAD [kg]	* MAX. STATIC LOAD [N]	MATERIAL
	M	L			
4.431.001	10	45	510	4990	Steel zinc plated, Rubber
4.431.001SN	10	45	710	6930	Stainless steel, Rubber
4.431.002	12	45	540	5340	Steel zinc plated, Rubber
4.431.002SN	12	45	730	7140	Stainless steel, Rubber
4.431.003	10	100	510	4990	Steel zinc plated, Rubber
4.431.003SN	10	100	710	6930	Stainless steel, Rubber
4.431.008	12	100	540	5340	Steel zinc plated, Rubber
4.431.008SN	12	100	730	7140	Stainless steel, Rubber
4.431.009	10	150	510	4990	Steel zinc plated, Rubber
4.431.009SN	10	150	710	6930	Stainless steel, Rubber
4.431.010	12	150	540	5340	Steel zinc plated, Rubber
4.431.010SN	12	150	730	7140	Stainless steel, Rubber

* The maximum working load is the value above which deformation or damage to the adjustable feet will occur during operation. When calculating the allowable load, the designer is required to apply an appropriate safety factor, appropriate to the importance and safety level of the application.